

## ASSISTANT COMMISSIONER FOR PATENTS

Washington, D.C. 20231

Transmitted herewith for filing is the patent application of

Inventor(s): Carl J. Sinfield

For: VENTLESS TIRE MOLD

Enclosed are:

- ☒ Five (5) sheet(s) of formal drawing(s)  
☒ An assignment of the Invention to Quality Mold Inc.  
 Specification - 9 pages  
☐ A certified copy of a \_\_\_\_\_ application  
☐ An associate power of attorney  
☒ Applicant is a Small Entity  
☒ Assignment check - \$40.00; PTO-1595 Assignment Recordal Sheet

The filing fee has been calculated as shown below:

For:	Small Entity					Other Than A Small Entity	
	No. Filed	No. Extra	Rate	Fee	Or	Rate	Fee
Basic Fee				\$355.00			\$710.00
Total Claims	8-20		x9	\$		x18	\$
Indep Claims	2-3		x40	\$		x80	\$
Multiple Dep. Claim Presented			+135			+270	\$
				Total	\$355.00	Total	\$

\_\_\_\_\_ Please charge my Deposit Account No. 18-0987 the amount of \$\_\_\_\_\_. A duplicate copy of this sheet is enclosed.

☒ A check in the amount of \$355.00 to cover the filing fee is enclosed.


☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 18-0987. A duplicate copy of this sheet is enclosed.

- ☒ Any additional filing fees required under 37 CFR 1.16  
☒ Any patent application processing fees under 37 CFR 1.17

\_\_\_\_\_ The Commissioner is hereby authorized to charge payment of the following fees during the pendency of this application or credit any overpayment to Deposit Account No. 18-0987. A duplicate copy of this sheet is enclosed.

- \_\_\_\_\_ Any patent application processing fees under 37 CFR 1.17  
 \_\_\_\_\_ The Issue Fee set in 37 CFR 1.18 at or before mailing of the Notice of Allowance, pursuant to 37 CFR 1.311(b)  
 \_\_\_\_\_ Any filing fees under 37 CFR 1.16 for presentation of extra claims

Respectfully submitted,



Ray L. Weber (Reg. No. 26,519)  
 Renner, Kenner, Greive, Bobak, Taylor & Weber  
 1610 First National Tower  
 Akron, OH 44308-1456  
 (330) 376-1242

A

11/01/00  
 09/703243  
 11/01/00

# VENTLESS TIRE MOLD

## TECHNICAL FIELD

- 5 The invention herein resides in the art of tire molding apparatus and techniques. More particularly, the invention relates to a ventless tire mold. More specifically, the invention presents a ventless tire mold which is made of a plurality of interconnecting pitches, with the interface of the pitches serving as vent lines for the mold cavity.

## BACKGROUND ART

- 10 It is well known that the manufacture of pneumatic tires typically requires the implementation of a mold and associated tire presses to form the tire tread in the green rubber and to hold the tire configuration while the green tire cures. In the past, the preparation of tire molds has generally been extremely labor intensive and involved highly skilled manual labor, both resulting in significant cost in the development of a  
15 tire mold.

- In the past, it has generally been known to employ a hand carver a computerized numeric controller (CNC) machine to make a master model of an appropriate material such as REN board, plaster, or the like. From the master model, foundry tooling is made and ultimately from the foundry tooling cores are developed. As is understood  
20 by those skilled in the art, a core is a sequence of pitches or tire tread elements. An appropriate number of cores with the requisite pitch sequences for the desired tread pattern were necessarily generated. These cores were then mated in the proper diameter and pitch sequence to define the requisite mold. This assembly was then cured and employed to make castings, from which the molds themselves could ultimately be made.

- 25 In the prior art process of casting tire cores, a number of shortcomings were present. Generally, undercuts were impossible to achieve except by tedious handwork. However, such undercuts are common in tire designs where sipes must be employed. Additionally, prior art molds necessarily required a large number of pinhole vents to  
30 allow air to escape from the mold as the tire was expanded into the mold during the curing operation. These pinhole vents required continuous cleaning and removal of cured rubber to prevent such blockage from impairing the efficiency of the mold.

As one can readily appreciate, these prior art mold designs are extremely time consuming and costly to manufacture, implement and maintain. Accordingly, there is

a need in the art for a tire molding apparatus and technique which overcomes these shortcomings of the prior art.

### SUMMARY OF INVENTION

5 In light of the foregoing, it is a first aspect of the invention to provide a tire molding apparatus and technique which is of a ventless nature.

Another aspect of the invention is the provision of a tire molding apparatus and technique in which segments of the tire mold are assembled single pitches, rather than cores.

10 Still a further aspect of the invention is the provision of tire molding apparatus and technique in which the venting of the mold is at the pitch line formed at the intersection of mating pitches, rather than through the addition of pinhole vents.

Still a further aspect of the invention is the provision of a tire molding apparatus and technique in which a model is made of a REN board, plaster or the like, sipes are set in the model itself then traditional master rubbers can be made.

15 A further aspect of the invention is the presentation of a tire molding apparatus and technique in which a mold may be developed by casting of single pitches, rather than entire cores.

20 Still a further aspect of the invention is the provision of a tire molding apparatus and technique which is readily conducive to implementation with state of the art materials and processes.

The foregoing and other aspects of the invention which will become apparent herein are achieved by a ventless tire mold, comprising: a plurality of mold segments nestingly interconnecting with each other at segment interferences to form an annular mold, said segment interfaces defining air passages from an interior of said annular mold.

25 Other aspects of the invention which will become apparent herein are attained by a method for making a ventless tire mold, comprising: (a) developing three dimensional models of tire tread portions; (b) installing sipes into the models; (c) generating foundry castings from the siped models; (d) preparing individual pitch profiles from said foundry castings; and (e) assembling a mold by nestingly interconnecting a plurality of said prepared individual pitch profiles.

### DESCRIPTION OF THE DRAWINGS

For a complete understanding of the objects, techniques and structure of the invention reference should be made to the following detailed description and accompanying drawings wherein:

5 Fig. 1 is a perspective view of an aluminum casting of a plurality of pitches made in accordance with the invention;

Fig. 2 illustrates a pair of pitches cut from a casting such as that shown in Fig. 1;

10 Fig. 3 is a perspective view of half of a mold made by sequentially inter-fitted pitches.

Fig. 4 is a flow chart of the tire mold/model casting process according to the prior art;

Fig. 5 is a flow chart of the mold machining process of the prior art;

15 Fig. 6 is a flow chart of the tire mold/model casting process according to the invention; and

Fig. 7 is a flow chart of the mold machining process according to the invention.

### BEST MODE FOR CARRYING OUT THE INVENTION

20 In accordance with the concept of the present invention, a tire mold will be made of a plurality of interconnected pitches, each pitch constituting a segment of a tire tread, and wherein the pitch lines defined by the mating interfaces of the pitches serve as air passage vents for the tire mold cavity. In effect, the tire mold is made in a puzzle-like fashion with the pitches comprising the pieces of the puzzle that inter-fit with each other to ultimately define the mold, and in which the interfaces between the puzzle pieces  
25 serve as mold vents.

In accordance with the invention, a model is made by carving a REN board, plaster, or the like by use of a multi-axis CNC machine in somewhat standard fashion. The carving in the REN board, plaster, or the like is a sequence of pitches having void spaces between them so that a tool path is present to cut each of the individual pitches  
30 along the pitch line. Once the pitches are cut, undercut ribs for incorporating sipes in the model may be easily achieved.

As shown in Fig. 1, an aluminum casting 10 can be made from the model of REN board, plaster, or the like in somewhat standard fashion. The aluminum casting 10

includes a plurality of pitches 12 separated by separator blocks 14. The voids between the blocks 14 and above pitches 12 allow for entry of an appropriate cutting tool to cut the pitches along the cut lines 16 defined by the intersection of the separator blocks 14 and pitches 12. As a consequence, the individual pitches 18, as shown in Fig. 2, are developed. As illustrated, the vertical sides 20 of the pitches 18 are contoured to mate with each other and are defined by the cut lines 16 as presented in Fig. 1. The vertical sides 20 define the pitch lines by which various pitches 18 nest with each other.

The nesting of the various pitches 18 to form the tread portion of a tire mold is illustratively shown in Fig. 3. Here, it can be seen that one half of a tire mold made in accordance with the invention is designated generally by the numeral 28. It will be appreciated by those skilled in the art that the tire mold 28 is typically of but not limited to the clamshell type mold, comprising upper and lower clamshell halves that are brought into sealing engagement with each other with a green tire carcass therein. This same process in creating models and mold parts may also be used in segmented molds. The tire mold being of a clamshell or segmented type is held shut by an appropriate tire press and the green tire is inflated by a bladder and urged against the inner walls of the tire mold. In this instance, the tread portion of the tire mold 28 is defined by a plurality of abuttingly interconnecting pitches 18, each abutting at pitch lines 20 defined by the interface of the vertical sides of the pitches themselves. These interfaces provide air passages for venting of the mold as the tire mold bladder is inflated to urge the green tire carcass into conforming engagement with the inner surface of the mold 28, and particularly the annular array of pitches 18.

Those skilled in the art will readily appreciate the simplicity by which the puzzle mold of the instant invention may be configured. Rather than devise a plurality of cores of appropriate diameter and pitch sequence for interfitting to define a mold, individual pitches may be made from a CNC carved model of REN board, plaster, or like material and then by a subsequent pour casting technique. The aluminum cast pitches, defined by voids therebetween, may then be easily cut from the aluminum casting so made, with each of the pitches then being easily operated upon to provide undercuts for sipes or the like in each individual pitch element. The various pitches 12 are then also machined for close nesting engagement with each other and to a desired smooth release surface for formation of and engagement with the tire tread. Moreover, the multitude of pinhole vents previously employed in the previous art have been eliminated, greatly reducing the

cost of not only manufacturing the mold, but maintaining it.

An appreciation of the advantages of the instant invention over the process and techniques of the prior art can best be achieved by a comparison of the two through reference to Figs. 4-7. As shown in Fig. 4, the prior art process for manufacturing the tire mold model/casting is designated generally by the numeral 30. As shown, engineering specifications for the associated tire are received from the customer, such as a tire manufacturer as designated at 32. Template layout and program is then undertaken and checked until the template layout is deemed satisfactory as at 34-38. The sweep template is then cut at 40 and the model is swept and checked at 42-44. Only then, can a model layout be made at 46. But that process includes repeated inspection and modification until the model layout is deemed satisfactory at 48.

After the model layout is complete, model carving and inspection is undertaken at 50-52 until a suitable carving is obtained. The carving is finished by point up at 54.

Those skilled in the art will also appreciate that the specification received from the customer at 32 also includes the specification regarding the sipes necessary for the model rubber tooling. Those specifications are passed to a sipe manufacturer at 56, who undertakes sipe preparation and inspection until the sipes are complete at 58. The sipes are then placed onto the carving at 60 and checked for accuracy at 62.

The core boxes for the model tooling are determined at 64 following model sweep check 44. The model rubber tooling is then prepared at 66 from the siped carving and the model rubber tooling is pointed up at 68 into a finished structure for casting of the master models at 70. The castings are checked at 72, round up and assembly undertaken at 74 and the casting pointed up at 76. Finishing of master model is undertaken at 78 where all of the final lines of the model are finished. Following final inspection at 80, the foundry tooling is prepared at 84 and the foundry castings made at 86.

With reference now to Fig. 5, it can be seen that the tread castings completed at 86 are received from the foundry at 92 and verified for accuracy at 94. Rough cuts on the castings are made for outside diameter, inside diameter, and parallel sides at 96. They are then rough drilled at 98 and finished at 100. Following an in process inspection for verification of accuracy at 102 the vent layouts are prepared at 104. Spot vents are prepared by center punch at 106 and vent holes are drilled on location at 108. The vent backside is channeled at 110 and the vent is chamfered and set at 112.

Thereafter, the micro-vents are installed at 114 at the numerous vent locations just prepared. The vents are inspected at 116 and reworked at 104-114 until the vents have all been approved.

5       Next in the process, the mold back or slide block is machined to accept the requisite tread ring at 118 and the tread ring is then assembled into the mold back or slide block and final machining is undertaken at 120. The mold is inspected at 122 and any necessary further machining is undertaken until the mold is deemed acceptable. The mold is then completed at 124 for tire manufacturing.

10       In contrast to the labor intensive methodology for prior tire mold development, including the placement of a multitude of tire vents, is the process of the instant invention as shown in flow chart form in Figs. 6 and 7.

15       With reference now to Fig. 6, an appreciation of the manufacturing process for the ventless tire mold/model casting according to the instant invention can be seen as designated by the numeral 130. Again, drawings or engineering specifications are received from the customer at 132 and a verification of the information so received is made at 134. Three dimensional models are then developed at 136 and a multi-axis CNC machine is employed to cut the models at 138. The model is assembled at 140 and inspected at 142. The model assembly is pointed up at 144 and readied for receipt of the requisite sipes. As will be appreciated by those skilled in the art, information  
20       respecting the sipes was received in the way of specifications from the customer at 132, verified at 134, and delivered to a sipe manufacturer at 146. The sipes are inspected upon receipt at 148 and then installed into the pointed up model assembly at 150. The final model is inspected at 152 and any additional modifications made. The final lines are imparted at 154.

25       It will further be appreciated by those skilled in the art that once the model is assembled at 140, the core boxes for foundry tooling can be defined at 156 such that the foundry tooling can be devised at 158 from the finished model. The foundry castings are then prepared at 160.

30       With reference now to Fig. 7, the process 170 shows receipt of the tread castings from the foundry at 172 and verification of the same for accuracy at 174. Rough cutting of the outside diameter, inside diameter and parallel surfaces is undertaken at 176, rough drilling at 178 and finished cutting at 180. With verification for accuracy being undertaken at 182.

In stark contradistinction to the prior art, at 184 finished CNC machining of individual pitch profile from tread ring casting is undertaken and the pitch profiles are removed from the tread casting ring at 184. Each of the individual pitches is inspected at 186 and further machining undertaken until the requisite machining is complete. The mold back or slide block is then machined to receive and accept each of the various tread pitch castings until completed at 188. Tread pitches are then assembled into the mold back or slide block at 190 with appropriate retention rings to retain each of the pitches therein. Finished machining of the mold as required for completion is also undertaken at 190. The mold is inspected at 192 and necessary further machining undertaken. The tire mold, comprised of a multitude of interconnected and interfaced pitches, is completed at 194.

Following the process of the instant invention, a mold comprising a plurality of interfaced pitches is achieved, with the venting of the mold being accomplished at the pitch interfaces, thus obviating the need for drilling, finishing, and placing of micro-vents throughout the mold itself. Moreover, maintenance of the mold is simplified since periodic cleaning of the micro vents is obviated.

Thus it can be seen that the objects of the invention have been satisfied by the structure presented above. While in accordance with the patent statutes, only the best mode and preferred embodiment of the invention has been presented and described in detail, the invention is not limited thereto or thereby. Accordingly, for an appreciation of the true scope and breadth of the invention, reference should be made to the following claims.



What is claimed is:

1. A ventless tire mold, comprising a plurality of mold segments nestingly interconnecting with each other at segment interfaces to form an annular mold, said segmented interfaces defining air passages from an interior of said annular mold.
2. The ventless tire mold according to claim 1, wherein said segments comprise tire tread pitches.
3. The ventless tire mold according to claim 2, wherein side surfaces of said segments are contoured for mating engagement of said segments.
4. The ventless tire mold according to claim 2, wherein said annular mold is absent vents within said segments themselves.
5. A method for making a ventless tire mold, comprising:
  - (a) developing three dimensional models of tire tread portions;
  - (b) installing sipes into the models;
  - (c) generating foundry castings from the siped models;
  - (d) preparing individual pitch profiles from said foundry castings; and
  - (e) assembling a mold by nestingly interconnecting a plurality of said prepared individual pitch profiles.
6. The method for making a ventless tire mold according to claim 5, wherein said three dimensional models are cut by a multi-axis CNC machine.
7. The method for making a ventless tire mold according to claim 6, wherein each said tire tread portion corresponds to a pitch.
8. The method for making a ventless tire mold according to claim 7, wherein undercut ribs are formed in said tire tread portions for receiving said sipes.

ABSTRACT

A tire molding apparatus and technique is provided for the ventless molding of tires. According to the invention, a series of pitches is formed in an appropriate REN board, plaster, or like material with the implementation of a CNC machine. An  
5 aluminum pour casting is made from the model in which the various pitches are separated by voids which allow for the entry of a cutting tool such that each individual pitch or tire tread segment can be cut from the aluminum casting. Sipe locations are then cut into the model. Master rubbers or foundry tooling is then created and the castings poured. The individual pitches are then matingly interengaged in a puzzle-like  
10 fashion along the interior of a tire mold to define the tread portion of the mold. Venting of the mold is achieved at the pitch line formed at the intersection of each of the pitches.

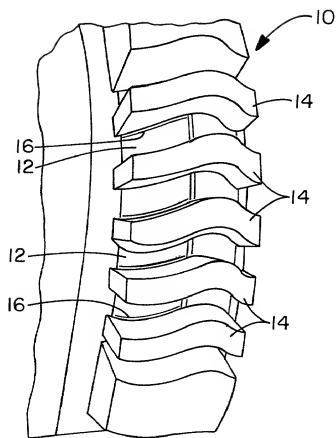


FIG. -1

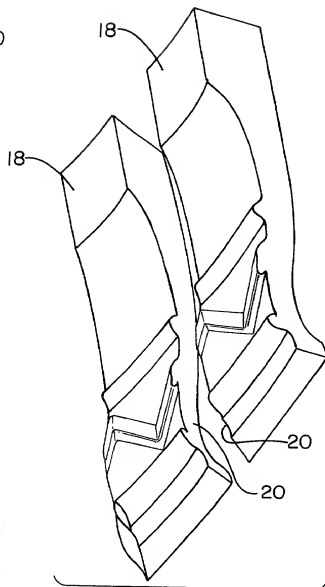


FIG. -2




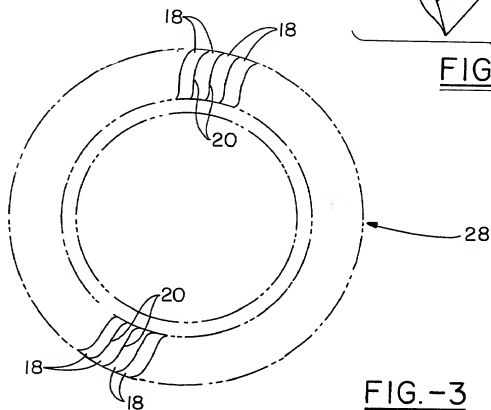



FIG. -3



**FIG.-4** Prior Art

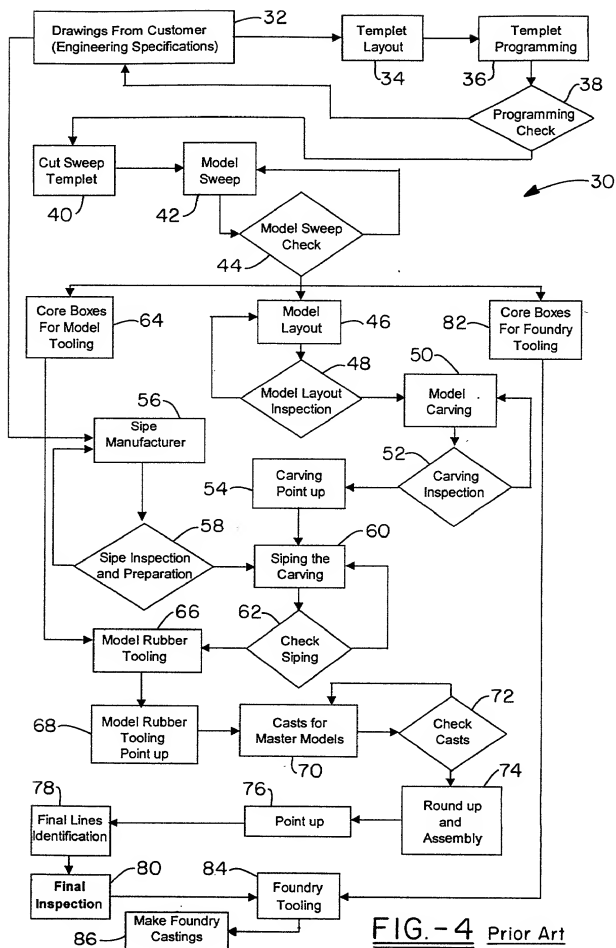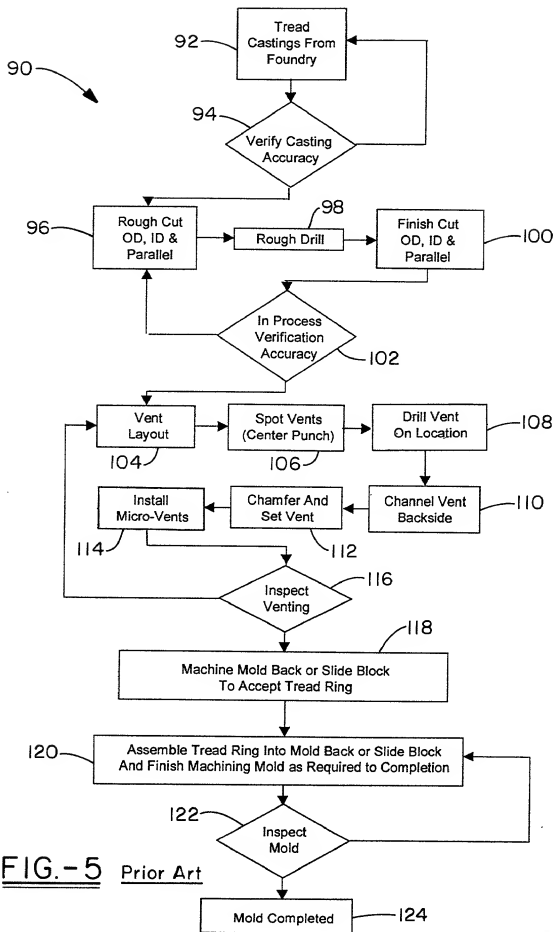

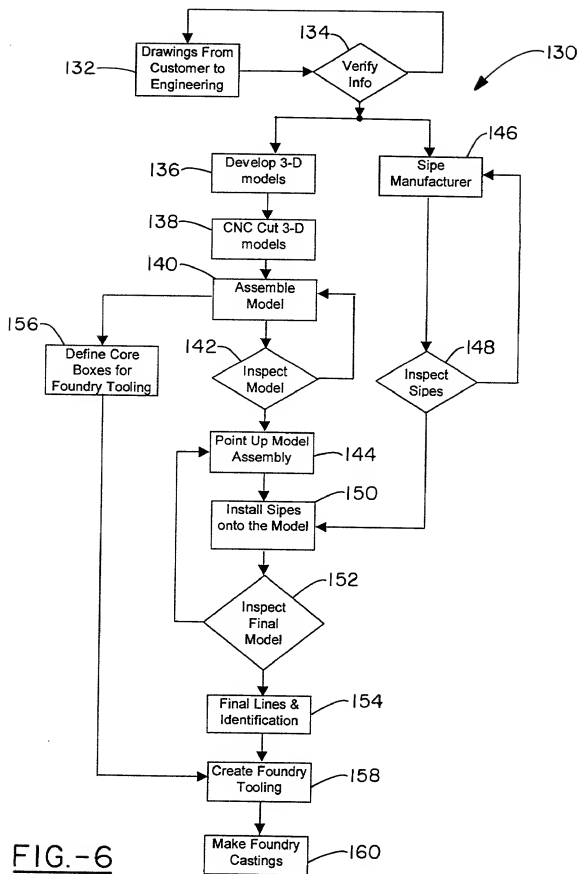

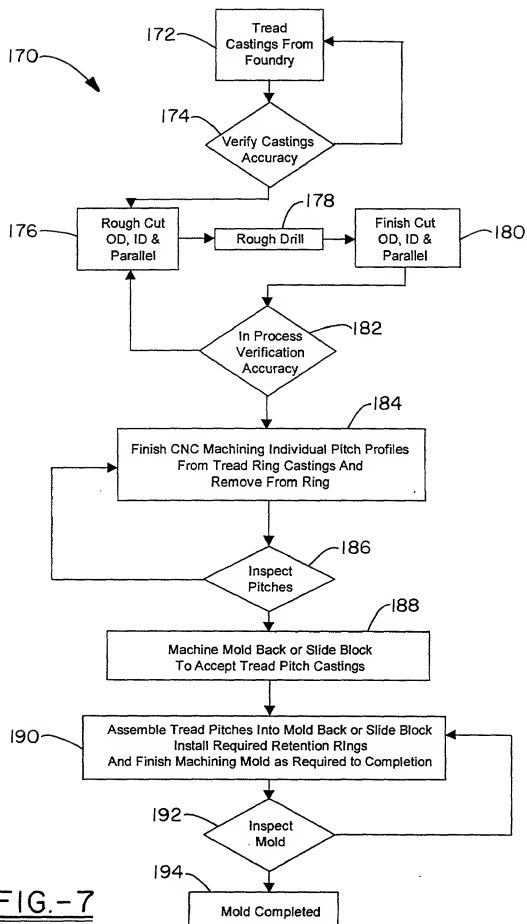

---

**COMBINED DECLARATION AND POWER OF ATTORNEY**

---

As the below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled

**VENTLESS TIRE MOLD**

the specification of which

  X   is attached hereto.

           was filed on                                  as Application Serial No.  
                                 and was amended on                                 .

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Priority Claimed

<u>Number</u>	<u>Country</u>	<u>Date Filed</u>	<u>Yes</u>	<u>No</u>
<u>Number</u>	<u>Country</u>	<u>Date Filed</u>	<u>Yes</u>	<u>No</u>
<u>Number</u>	<u>Country</u>	<u>Date Filed</u>	<u>Yes</u>	<u>No</u>



### English Language Declaration

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Application Ser. No.	Filing Date	Status
----------------------	-------------	--------

Application Ser. No.	Filing Date	Status
----------------------	-------------	--------

**POWER OF ATTORNEY:** As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith:

Jack L. Renner (Reg. No. 20,116); Reese Taylor (Reg. No. 22,325); Phillip L. Kenner (Reg. No. 22,353); Edward G. Greive (Reg. No. 24,726); Donald J. Bobak (Reg. No. 27,182); Ray L. Weber (Reg. No. 26,519); Joseph G. Curatolo (Reg. No. 28,837); Rodney L. Skoglund (Reg. No. 36,010); Andrew B. Morton (Reg. No. 37,400); Arthur M. Reginelli (Reg. No. 40,139); Shannon V. McCue (Reg. No. 42,859); Michael F. Morgan (Reg. No. 42,906); Salvatore A. Sidoti (Reg. No. 43,921); John J. Cunniff (Reg. No. 42,451) and Mark L. Weber (Reg. No. 46,069)

**Send Correspondence to:**

Ray L. Weber  
Renner, Kenner, Greive, Bobak, Taylor & Weber  
1610 First National Tower  
Akron, Ohio 44308

**Direct Telephone Calls to:**

Ray L. Weber  
Telephone: (330) 761-6662

---

### DECLARATION

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereof.

### SIGNATURE

Inventor:

  
CARL J. SINFIELD

Date OCT 23, 2000

Residence: 8311 Country Street N.W., Massillon, Ohio 44646

Post Office Address: 8311 Country Street N.W., Massillon, Ohio 44646

Citizenship: United States